


As you saw previously, MVC will look through three default binding sources to find a match for your action parameters:


Form values

Route values


Query string values

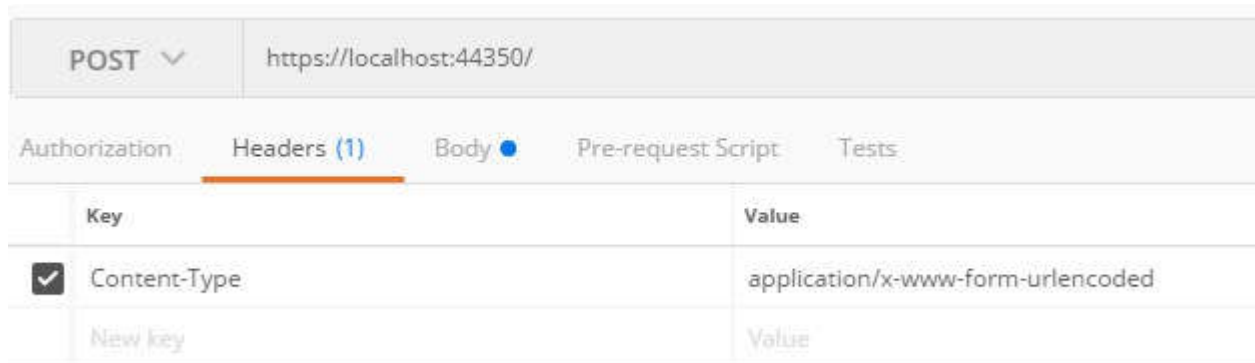

telling the web app the value will come from form



POST 		https://localhost:44350/
Authorization Headers (1) Body ● Pre-request Script Tests		
	Key	Value
<input checked="" type="checkbox"/>	Content-Type	application/x-www-form-urlencoded
	New key	Value

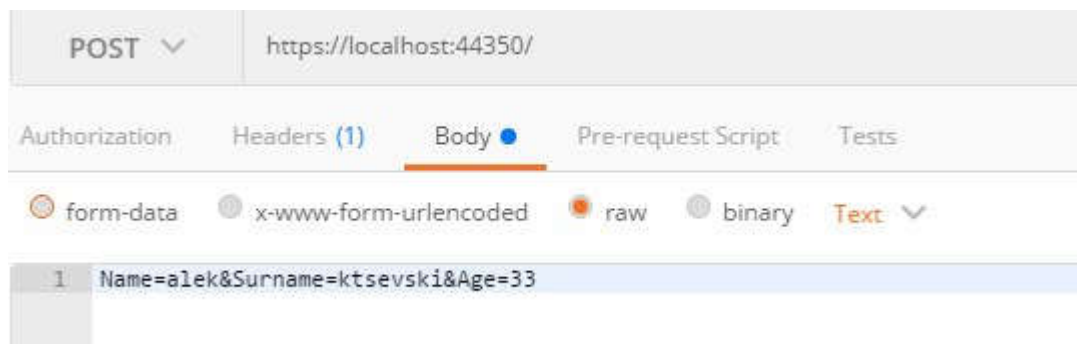form data format



POST 		https://localhost:44350/
Authorization Headers (1) Body ● Pre-request Script Tests		
form-data x-www-form-urlencoded raw binary Text 		
1	Name=alek&Surname=ktsevski&Age=33	